



T/GB 2003 / 0 0 3 1 2 0



INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 29 AUG 2003

WIPO PCT


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

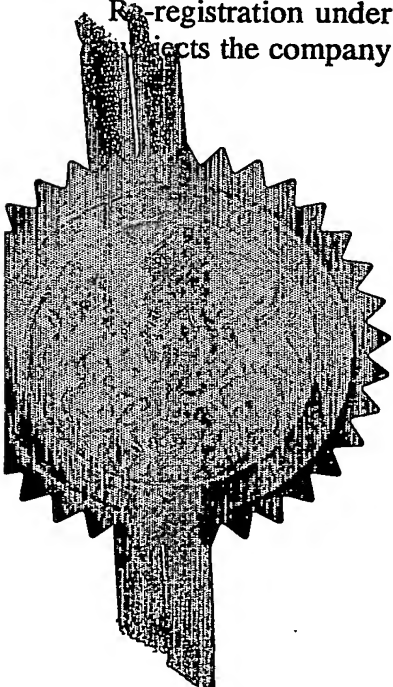

Signed

Dated 4 August 2003

BEST AVAILABLE COPY

The
Patent
Office

20 JUL 2002

Request for grant of a patent

(see the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1/77

22JUL02 E734969-1 000354
P01/7700 0.00-0216932.4

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	PJA/C089167PGB		
2.	Patent application number (The Patent Office will fill in this part)	0216932.4		20 JUL 2002
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	HEAT TRACE LIMITED TRACER HOUSE CROMWELL ROAD BREDBURY STOCKPORT CHESHIRE SK6 2RF		
	Patents ADP number (if you know it)			
	If the applicant is a corporate body, give the country/state of its incorporation	UNITED KINGDOM	657571400	
4.	Title of the invention	ELECTRICAL HEATING CABLE		
5.	Name of your agent (if you have one)	Marks & Clerk		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Sussex House 83-85 Mosley Street Manchester M2 3LG		
	Patents ADP number (if you know it)	18004		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of Inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	6
Claim(s)	1
Abstract	1
Drawing(s)	2 + 2

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of Inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(Please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature..... Date 19 July 2002

MARKS & CLERK

12. Name and daytime telephone number of person to contact in the United Kingdom

MR P.J ALLMAN - 0161 233 5805

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

ELECTRICAL HEATING CABLE

The present invention relates to an electrical heating cable the power output of which is self limiting as the result of the incorporation of components with a positive temperature coefficient.

Self limiting heating cables are well known. Generally these comprise two conductors extending along the length of the cable and embedded in a polymeric body manufactured from a material providing a positive temperature coefficient. Thus as the temperature of the cable increases the resistance of the material electrically connected between the conductors increases, thereby reducing power output.

Non-self limiting heating cables are known which comprise two power supply conductors extending along the length of the cable and a heating wire which extends along the cable and between the two conductors so as to define a series of heating elements connected in parallel between the conductors. Typically the conductors are enclosed in insulating sheaths and the two sheathed conductors are then encased in a further sheath onto which a heating wire is spirally wound. Portions of the sheaths are cut away so as to enable the heating wire to contact each of the conductors in turn, thereby establishing a series of sections of heating wire which are connected in parallel between the two conductors. Such an arrangement is particularly advantageous as the power output per unit length of the cable can be adjusted simply by adjusting the spacing (in the direction of the length of the cable) between adjacent sections where the sheaths are cut away to enable the heating wire to contact the conductors. Thus with a standard starting component cables delivering different power outputs can be manufactured simply by adjusting the spacing between the portions of the sheaths which are cut away.

US Patent No. 5512732 describes a heating cable which incorporates a spirally wound heating wire which as described above is alternately connected to each of two power conductors. The cable described in US Patent No. 5512732 also provides a self-limiting performance as the result of the incorporation of a thermally actuated switch

into the circuit of each of the parallel heating elements defined by the heating wire. A resistive heating element is connected in parallel with each switch so that current passes through the resistive element when the switch is open and current is shunted around the resistive element when the switch is closed. Such an arrangement can provide a self-limiting performance but is difficult to manufacture as compared with non-self limiting heating cable incorporating a spirally wound heating wire.

It is an object of the present invention to provide an improved electrical heating cable.

According to the present invention, there is provided an electrical heating cable comprising at least two power supply conductors extending along the length of the cable and a heating wire which extends along the cable and between the two conductors so as to define a series of heating elements connected in parallel between the conductors, wherein at least one of the conductors is encased in a sheath of material which has a positive temperature coefficient and the heating wire is in electrical contact with the outer surface of the sheath such that the sheath is electrically connected in series between each heating element and the conductor encased by the sheath.

Preferably, the cable comprising a first conductor encased in a first sheath, a second conductor encased in a second sheath manufactured from a material with a positive temperature coefficient, a third sheath encasing a first and second sheath, and a heating wire wound around the first sheath, portions of the third sheath being removed to cause the heating wire to contact the second sheath.

The first sheath may be electrically insulating and in contact with the second sheath, portions of the first and third sheaths being removed to cause the heating wire to contact the first conductor.

An embodiment of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic representation of the electrical characteristics of an embodiment of the present invention;

Figure 2 is a partially cut away perspective view of the embodiment schematically represented in Figure 1;

Figure 3 is a section on the line 3-3 of Figure 2;

Figure 4 is a section through the structure illustrated in Figure 2 at a position spaced from the plane of the section of Figure 3;

Figure 5 is a schematic representation of the performance of the embodiment of Figures 1 to 3; and

Figure 6 is a schematic representation of the performance of a conventional temperature-limited heating cable.

Referring to Figure 1, the illustrated heating cable comprises a first copper power supply conductor 1 and a second copper power supply conductor 2. The first conductor 1 is enclosed in an insulating sheath 3 whereas the second conductor 2 is encased in a sheath 4 which incorporates a positive temperature coefficient (PTC) component such that the electrical resistance of the sheath 4 is generally low but rises rapidly as soon as a critical switching temperature is reached. A heating wire makes direct contact with the conductor 1 through openings formed in the sheath 3 at points 5, 6 and 7. The same heating wire makes contact with the outside of the sheath 4 at points 8, 9 and 10. If the ends 11 of the two conductors 1 and 2 are connected to respective terminals of a power supply the heating wire forms five parallel heating zones corresponding to heating wire sections 12, 13, 14, 15 and 16. Each of these sections will generate heat as a function of the voltage applied between terminals 11, the electrical characteristics of the heating wire, and the electrical resistance presented by the sheath 4 to the flow of current between the heating wire and the power supply conductor 2.

Referring to Figure 2, this shows the structure which results in the characteristics schematically represented in Figure 1. The sheath 3 and 4 are encased in an insulation jacket 17. In Figure 2 the heating wire which forms the heating sections 12 to 16 is shown as a spiral of wire 18 spirally wound around the outside of the insulation jacket

17. Portions of the sheath 17 are cut away to enable the wire 18 to contact the outside of the sheath 4 (as shown in Figure 2) and the conductor 1, the cut away portions being staggered along the length of the cable so that spaced portions of the wire 18 are alternately connected to the conductor 1 and the sheath 4. The heating wire is encased in a further insulation jacket 19 which is received in an outer cover 20.

Figure 3 is a section on line 3-3 of Figure 2 and shows how the heating wire 18 is wrapped around the outer surface of the sheath 4 formed around conductor 2. Figure 4 is an equivalent section through a portion of the cable not shown in Figure 2 where the sheath 17 and sheath 3 are cut away to enable the heating wire 18 to contact the conductor 1.

As there is direct contact between a number of turns of the heating wire 18 and the conductor 1 there is a substantially zero resistance electrical junction between the conductor 1 and the heating wire 18. In contrast, the heating wire 18 does not make direct contact with the conductor 2 but rather contacts the outer surface of the sheath 4. Thus the sheath 4 is connected electrically in series between the conductor 2 and those turns of the wire 18 which contact the sheath 4. The resistance presented by the sheath 4 is a function of temperature as the sheath 4 incorporates PTC material. Thus, by appropriate selection of the characteristics of the PTC material incorporated in the sheath 4, the relationship between the output power of the heating cable and the temperature of the cable can be accurately controlled.

Figure 5 is a graph illustrating the relationship between power and temperature assuming that the PTC component incorporated in the sheath 4 is selected such that the electrical resistance provided by the sheath 4 rises very rapidly when a critical temperature T_c is reached. With such a performance the heating cable can be used as a constant power heater. It would be possible to incorporate PTC components in the sheath 4 so as to achieve an output power which declines gradually with temperature and one such characteristic is illustrated in the graph of Figure 6. Generally the performance represented in Figure 5 will be preferred.

In the illustrated embodiment, the conductors 1 and 2 may be tin or nickel coated copper having for example nineteen strands of copper each 0.45mm in diameter to give a cross section for example of approximately 3 square millimetres. The insulation jacket 3 may be of a fluoropolymer such as MFA with a thickness of up to 1mm. The PTC containing coating 4 may be a thermoplastic or fluoropolymer depending on the intended operating temperature. For example a thermoplastic polyethylene could be used in an application where the maximum temperature is intended to be in the region of 80°C whereas a fluoropolymer may be used when the operating temperature is intended to be up to 150°C. The main ingredient of the sheath 4 providing the PTC performance will generally be carbon black supplemented with mineral fillers. The characteristics of PTC compounds used in heating cables are widely discussed in the relevant literature and the selection of an appropriate compound will depend upon the final operating characteristics desired.

The heating wire 18 may be nickel chromium and the insulation and outer jackets 19 and 20 may be of MFA. The wattage per unit length of the cable will be determined by the spacing between the regions at which the heating wire 18 contacts alternately the conductor 1 and the PTC jacket 4. Thus a standard product can be produced up to and including the jacket 17. Portions of the jacket 17 may then be removed with the spacing between adjacent portions being determined by the desired final electrical characteristics. The heating wire 18 can then be wound onto the cable and covered by the insulation jacket 19 and outer jacket 20.

A thermally conductive material in for example paste or spray-on form may be applied to the exposed portions of the conductor 1 and jacket 4 to improve electrical contact with the subsequently wound heating wire 18 and to reduce the risk of damage to the PTC jacket 4.

In the described embodiment of the invention only one of the two conductors 1, 2 is encased in a PTC sheath. It would be possible to enclose both conductors in a PTC sheath so that each section of the heating wire is connected in series with two PTC sheaths either of which would be sufficient to provide the necessary self-limiting

performance. In such an arrangement it would of course be necessary to ensure that the two PTC sheaths were separated to avoid a short-circuit.

CLAIMS

1. An electrical heating cable comprising at least two power supply conductors extending along the length of the cable and a heating wire which extends along the cable and between the two conductors so as to define a series of heating elements connected in parallel between the conductors, wherein at least one of the conductors is encased in a sheath of material which has a positive temperature coefficient and the heating wire is in electrical contact with the outer surface of the sheath such that the sheath is electrically connected in series between each heating element and the conductor encased by the sheath.
2. An electrical heating cable according to claim 1, comprising a first conductor encased in a first sheath, a second conductor encased in a second sheath manufactured from a material with a positive temperature coefficient, a third sheath encasing the first and second sheaths, and a heating wire round around the third sheath, portions of the third sheath being removed to cause the heating wire to contact the second sheath.
3. An electrical heating cable according to claim 2, wherein the first sheath is electrically insulating and is in contact with the second sheath, portions of the first and third sheaths being removed to cause the heating wire to contact the first conductor.
4. An electrical heating cable substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACT

An electrical heating cable of the type in which two power supply conductors extend along the length of the cable and the heating wire extends along the length of the cable and between the two conductors so as to define a series of heating elements connected in parallel between the conductors. One or both of the conductors is encased in the sheath of material which has a positive temperature coefficient and the heating wire is in electrical contact with the outer surface of the sheath. As a result the sheath is electrically connected in series between each heating element and the conductor encased by the sheath. The sheath may be manufactured from a material which provides a very rapid rise in electrical resistance at a predetermined temperature, thereby enabling the manufacture of a cable which delivers substantially constant power below the predetermined temperature with a rapid reduction in power output at the predetermined temperature.

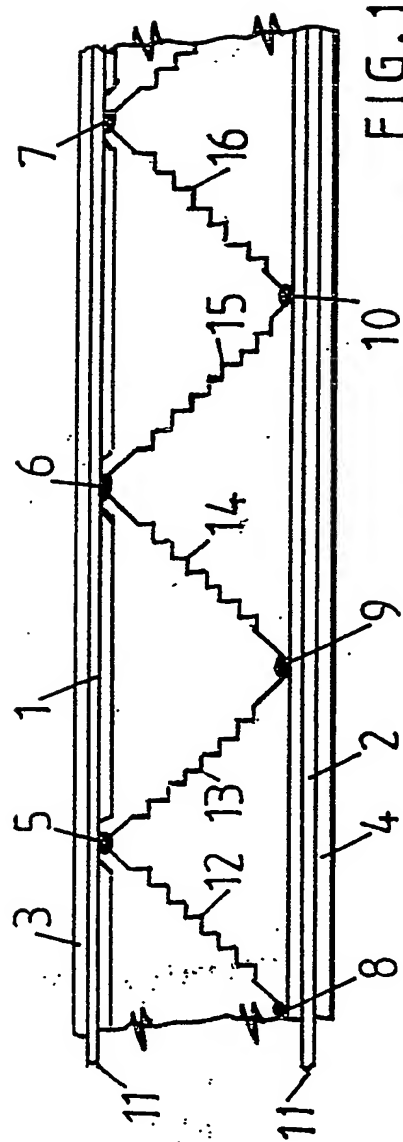


FIG. 1

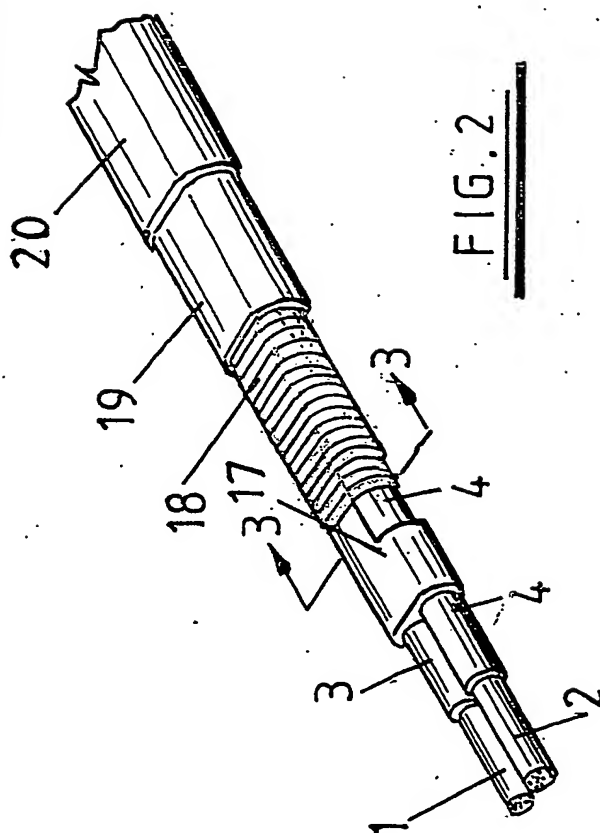


FIG. 2

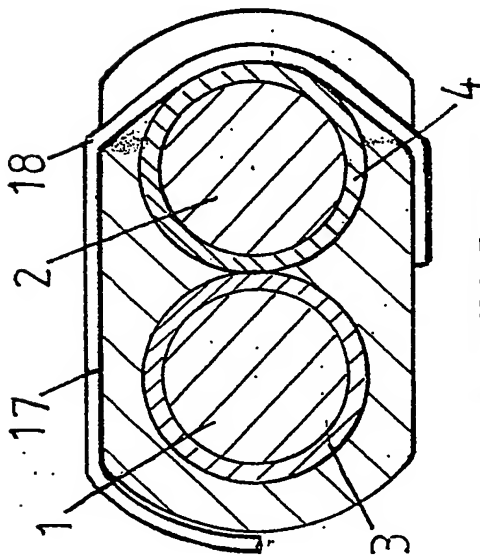


FIG. 3

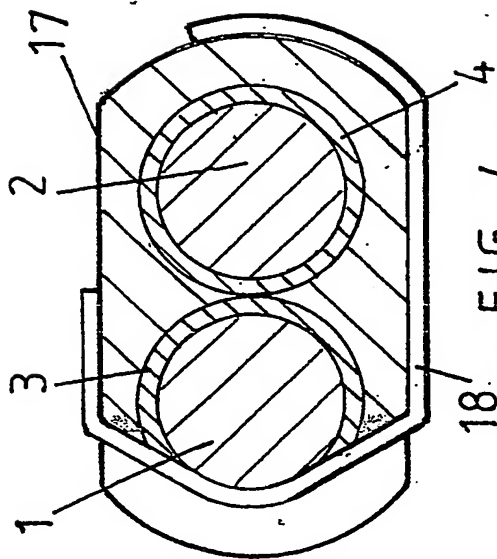


FIG. 4

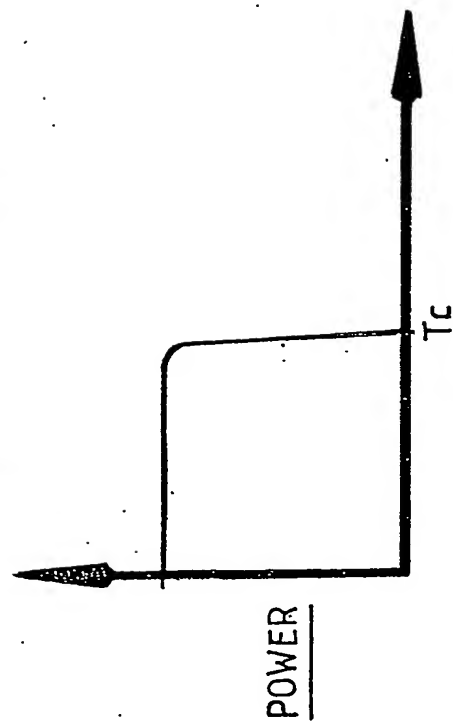


FIG. 5

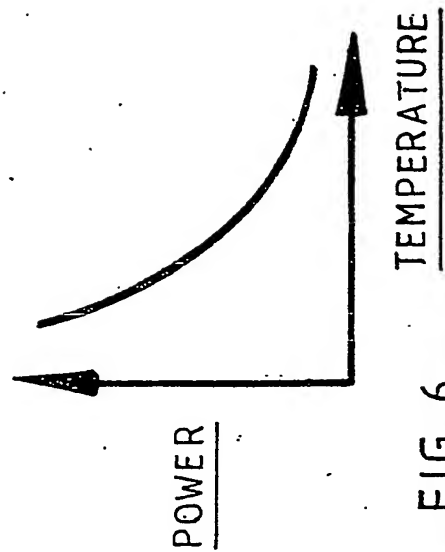


FIG. 6